

# STANDALONE




## STANDALONE CUBE

A single-port central unit for protecting and charging a product.



## CUBE SENSOR FUNCTIONS

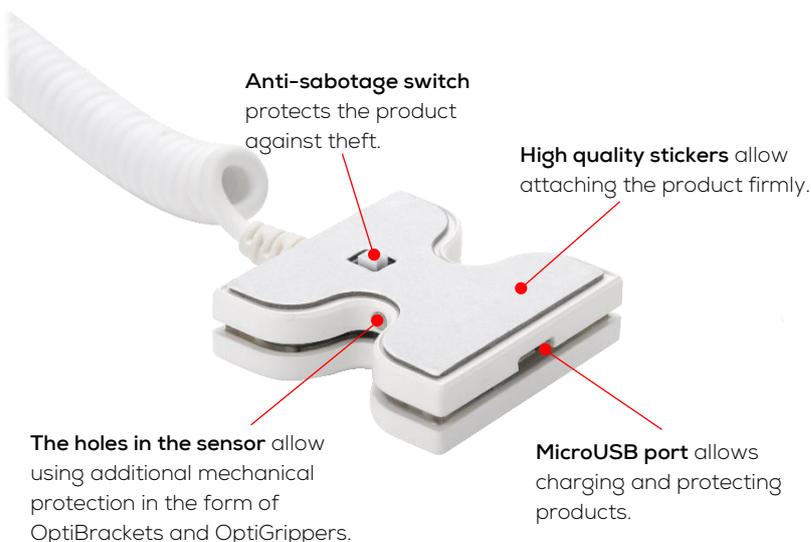

## OPERATING STATUS INDICATION

**LEDs indicate** the operating status of the protective system.



**The loudspeaker** acoustically signals the operating status of the protective system. The sound level is 90 dB.

2 in 1

**Rotatable casing** allows adjusting Cube to one's needs. Thanks to that solution a user decides how a protected product is presented, i.e. at 25° or horizontally.



# STANDALONE



## DIMENSIONS




## SPIRAL CABLE OUTLET

There is a version of sensors available that allows leading the cable from the BACK.



## STABILIZATION

Strong magnets ensure product stability.

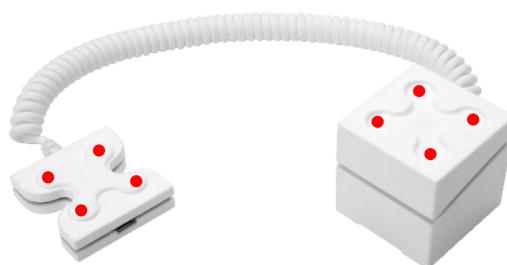

## POWER CABLE OUTLET

Two ways of leading the cable out allow adjusting the alarm system to customer needs.



## USAGE

Simple and convenient use thanks to RJ, USB-A and DC connectors.

